

Pipe Wraps - 4 Hour

Wraps seal flammable pipes in a fully developed fire by crushing the pipe. They are suitable for UPVC applications from 55mm to 160mm diameter** located inside a wall or floor structure.

Main Benefits:

- ✓ Fire rating up to 4 hours*
- ✓ Totally unaffected by water
- ✓ Identification on every wrap for full traceability
- ✓ Simple to use - quick to install



** larger sizes available on request

* for guidance only, please refer to our technical department for test evidence.

Code	Pipe Outside Diameter (mm)	Wrap Length (mm)	Pipe Type	Diameter of hole required (mm)	Rating
PPW55	55	175	UPVC SWR	70	4 hour*
PPW82	82	260	UPVC SWR	98	4 hour*
PPW110	110	350	UPVC SWR	130	4 hour*
PPW160	160	505	UPVC SWR	190	4 hour*


Pipe Collars 2 or 4 Hour - Stainless Steel (4 Hour only)

Collar casings are stainless steel (4 hour only) with an easy to use tab fastening system.

They are suitable for fitting to concrete, masonry, porous concrete or stud wall constructions.

Main Benefits:

- ✓ Fire rating up to 4 hours*
- ✓ Stainless steel case (4hr only)
- ✓ Tab Closing
- ✓ Identification on every collar for full traceability
- ✓ Slimline construction
- ✓ Bendable for the tightest of applications
- ✓ Retractable lugs for fitting
- ✓ Totally unaffected by water

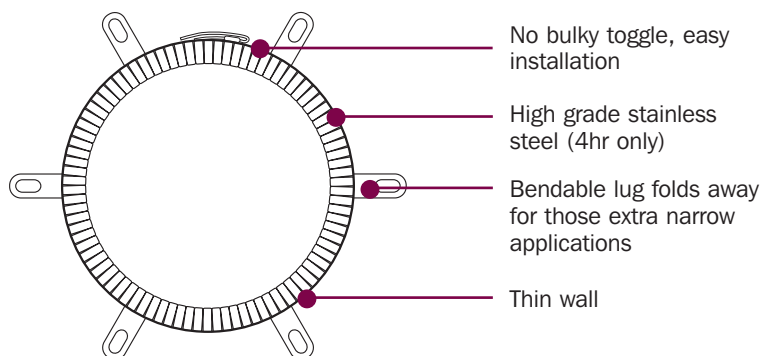

* for guidance only, please refer to our technical department for test evidence.

Note: Larger sizes available on request

Code	Pipe OD (mm)	Qty	Pipe Type	Rating
COL55-2HR	55	1+	UPVC SWR	2 hour*
COL82-2HR	82	1+	UPVC SWR	2 hour*
COL110-2HR	110	1+	UPVC SWR	2 hour*
COL160-2HR	160	1+	UPVC SWR	2 hour*

Code	Pipe OD (mm)	Qty	Pipe Type	Rating
COL55-4HR	55	1+	UPVC SWR	4 hour*
COL82-4HR	82	1+	UPVC SWR	4 hour*
COL110-4HR	110	1+	UPVC SWR	4 hour*
COL160-4HR	160	1+	UPVC SWR	4 hour*

